

COMPACT LED

Reuse your existing fixtures and keep the freedom to replace light sources. Compact LED fits all common bases for easy replacement of old CFL and low-energy lamps.



- High energy savings
- Replacement for all old CFL lamps
- 2G11, G24q, G24d, GX24d, GX24q, 2G7, G23, 2G10
- Lifetime: approx. 30,000–50,000 hours
- For HF ballast/LED driver or direct 230V
- 2–3 year warranty
- RoHS compliant
- Dimmable/DALI with LED driver
- 180° or 360° light distribution
- Good color rendering: Ra >82
- Flicker-free

www.lightingstandard.eu
info@lightingstandard.eu
Phone: +46 70 22 43 775



LED G23, FOR MAGNETIC BALLAST + 230V



LED G23 for magnetic ballasts or direct 230V connection.
CRI >80, 180° light distribution, 100–240V.

ITEM NUMBER	DESCRIPTION
G23MS3-(30-60)5OSLBEN	Watt: 3W Lumen: 130-150lm/W Material: AL+PC Size: 108mm, dia: 34mm Replaces 5W
G23MS4-(30-60)7OSLBEN	Watt: 4W Lumen: 130-150lm/W Material: AL+PC Size: 136mm, dia: 34mm Replaces 7W
G23MS5-(30-60)9OSLBEN	Watt: 5W Lumen: 130-150lm/W Material: AL+PC Size: 166mm, dia: 34mm Replaces 9W
G23MS6-(30-60)11OSLBEN	Watt: 6W Lumen: 130-150lm/W Material: AL+PC Size: 235, dia: 34mm Replaces 11W
GX23MS6-(30-60)13BEN	GX23 Watt: 6W Lumen: 130-150lm/W Material: AL+PC Size: 175, dia: 30mm Replaces 13W 360° light distribution



The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED G24D – FOR MAGNETIC BALLAST + 230V



**LED G24D for magnetic ballasts or direct 230V connection.
CRI >80, 180° light distribution, 100–240V.**



ITEM NUMBER	DESCRIPTION
G24DMS5-(30-60)10OSLBEN	Watt: 5W Lumen: 130-150lm/W Material: AL+PC Size: 120mm, dia: 34mm Replaces 10W
G24DMS6-(30-60)13OSLBEN	Watt: 6W Lumen: 130-150lm/W Material: AL+PC Size: 144mm, dia: 34mm Replaces 13W
G24DMS7-(30-60)18OSLBEN	Watt: 7W Lumen: 130-150lm/W Material: AL+PC Size: 158mm, dia: 34mm Replaces 18W
G24DMS9-(30-60)26OSLBEN	Watt: 9W Lumen: 130-150lm/W Material: AL+PC Size: 164mm, dia: 34mm Replaces 26W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED G24D – SLIM 230V



**LED G24D, 2-pin, for 230V direct connection only.
CRI >80, 360° light distribution, 100–240V.**

ITEM NUMBER

DESCRIPTION

G24DMS5-(30-60)10BEN-S

Watt: 5W
Lumen: 130-150lm/W
Material: AL+PC
Size: 96mm, dia: 31mm
Replaces 10W

G24DMS6-(30-60)13BEN-S

Watt: 6W
Lumen: 130-150lm/W
Material: AL+PC
Size: 163mm, dia: 31mm
Replaces 13W

G24DMS7-(30-60)18BEN-S

Watt: 7W
Lumen: 130-150lm/W
Material: AL+PC
Size: 163mm, dia: 34mm
Replaces 18W

G24DMS9-(30-60)26BEN-S

Watt: 9W
Lumen: 130-150lm/W
Material: AL+PC
Size: 163mm, dia: 31mm
Replaces 26W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED G24Q – 230V



**LED G24Q, 4-pin, for 230V direct connection only.
CRI >80, 180° light distribution, 100–240V.**



ITEM NUMBER

DESCRIPTION

G24QMS5-(30-60)10OSLBEN
Watt: 5W
Lumen: 130-150lm/W
Material: AL+PC
Size: 102mm, dia: 34mm
Replaces 10W

G24QMS6-(30-60)13OSLBEN
Watt: 6W
Lumen: 130-150lm/W
Material: AL+PC
Size: 130mm, dia: 34mm
Replaces 13W

G24QMS7-(30-60)18OSLBEN
Watt: 7W
Lumen: 130-150lm/W
Material: AL+PC
Size: 146mm, dia: 34mm
Replaces 18W

G24QMS9-(30-60)26OSLBEN
Watt: 9W
Lumen: 130-150lm/W
Material: AL+PC
Size: 164mm, dia: 34mm
Replaces 26W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED G24Q – FOR BALLAST + 230V



LED G24Q, 4-pin, compatible with magnetic and electronic ballasts or direct 230V connection. CRI >80, 180° light distribution, 100–240V.

ITEM NUMBER

DESCRIPTION

G24QEMS5-(30-60)10OSLBEN
Watt: 5W
Lumen: 130-150lm/W
Material: AL+PC
Size: 102mm, dia: 34mm
Replaces 10W

G24QEMS6-(30-60)13OSLBEN
Watt: 6W
Lumen: 130-150lm/W
Material: AL+PC
Size: 130mm, dia: 34mm
Replaces 13W

G24QEMS7-(30-60)18OSLBEN
Watt: 7W
Lumen: 130-150lm/W
Material: AL+PC
Size: 146mm, dia: 34mm
Replaces 18W

G24QEMS9-(30-60)26OSLBEN
Watt: 9W
Lumen: 130-150lm/W
Material: AL+PC
Size: 164mm, dia: 34mm
Replaces 26W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED G24Q – DIMMABLE FOR DALI LED DRIVER



**LED G24Q, 4-pin, for dimmable LED driver.
CRI >80, 180° light distribution.**



ITEM NUMBER

DESCRIPTION

G24QDC5-(30-60)10OSLBEN
För LED driver: OTI DALI 15/220-240/1A0 NFC
Watt: 5W
Lumen: 130-150lm/W
Material: AL+PC
Size: 102mm, dia: 34mm
Replaces 10W


G24QDC6-(30-60)13OSLBEN
För LED driver: OTI DALI 15/220-240/1A0 NFC
Watt: 6W
Lumen: 130-150lm/W
Material: AL+PC
Size: 130mm, dia: 34mm
Replaces 13W

G24QDC7-(30-60)18OSLBEN
För LED driver: OTI DALI 15/220-240/1A0 NFC
Watt: 7W
Lumen: 130-150lm/W
Material: AL+PC
Size: 146mm, dia: 34mm
Replaces 18W

G24QDC9-(30-60)26OSLBEN
För LED driver: OTI DALI 15/220-240/1A0 NFC
Watt: 9W
Lumen: 130-150lm/W
Material: AL+PC
Size: 164mm, dia: 34mm
Replaces 26W

DAL015OT11A0-OSR

OSRAM DALI LED Driver OTI DALI 15/220-240/1A0 NFC

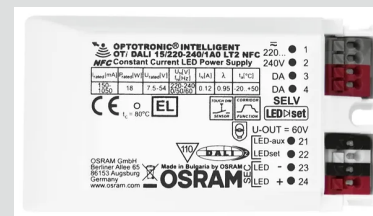

TRIAC10-BEST

BEST Triac Dimming Driver, 10W. 109.63, W 41, H 26.32mm

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED GX24D – FOR MAGNETIC BALLAST + 230V



**LED GX24D, 2-pin, for magnetic ballasts or direct 230V connection.
CRI >80, 360° light distribution, 100–240V.**

ITEM NUMBER

DESCRIPTION

G24DMS6-(30-60)13BEN

Watt: 6W
Lumen: 130-150lm/W
Material: AL+PC
Size: 135mm, dia: 50mm
Replaces 13W

G24DMS10-(30-60)18BEN

Watt: 10W
Lumen: 130-150lm/W
Material: AL+PC
Size: 135mm, dia: 50mm
Replaces 18W

G24DMS12-(30-60)26BEN

Watt: 12W
Lumen: 130-150lm/W
Material: AL+PC
Size: 142mm, dia: 50mm
Replaces 26W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED GX24Q – FOR BALLAST + 230V



LED GX24Q, 4-pin, compatible with magnetic or HF electronic ballasts, or direct 230V connection. CRI >80, 360° light distribution, 100–240V.



ITEM NUMBER

DESCRIPTION

G24QEMS6-(30-60)13BEN
Watt: 6W
Lumen: 130-150lm/W
Material: AL+PC
Size: 109mm, dia: 50mm
Replaces 13W

G24QEMS7-(30-60)18BEN
Watt: 7W
Lumen: 130-150lm/W
Material: AL+PC
Size: 109mm, dia: 50mm
Replaces 18W

G24QEMS10-(30-60)26BEN
Watt: 10W
Lumen: 130-150lm/W
Material: AL+PC
Size: 109mm, dia: 50mm
Replaces 26W

G24QEMS12-(30-60)32BEN
Watt: 12W
Lumen: 130-150lm/W
Material: AL+PC
Size: 142mm, dia: 50mm
Replaces 32W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED GX24Q – DIMMABLE FOR DALI LED DRIVER



**LED GX24Q, 4-pin, for dimmable LED driver.
CRI >80, 180° light distribution.**



ITEM NUMBER


DESCRIPTION

G24QDC12-(30-60)32BEN

Watt: 12W
Lumen: 130-150lm/W
Material: AL+PC
Size: 142mm, dia: 50mm
Replaces 32W

DAL015OT11A0-OSR

OSRAM DALI LED Driver OTI DALI 15/220-240/1A0 NFC

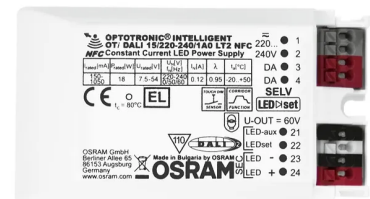

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED 2G7 – 230V



**LED 2G7, 4-pin, for 230V only.
CRI >80, 180° light distribution, 100–240V.**



ITEM NUMBER

DESCRIPTION

2G7MS3-(30-60)5OSLBEN
Watt: 3W
Lumen: 130-150lm/W
Material: AL+PC
Size: 89mm, dia: 34mm
Replaces 5W

2G7MS4-(30-60)7OSLBEN
Watt: 4W
Lumen: 130-150lm/W
Material: AL+PC
Size: 119mm, dia: 34mm
Replaces 7W

2G7MS5-(30-60)9OSLBEN
Watt: 5W
Lumen: 130-150lm/W
Material: AL+PC
Size: 149mm, dia: 34mm
Replaces 9W

2G7MS6-(30-60)11OSLBEN
Watt: 6W
Lumen: 130-150lm/W
Material: AL+PC
Size: 219mm, dia: 34mm
Replaces 11W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED 2G10 – 230V



**LED 2G10, 4-pin, for direct 230V connection only.
CRI >80, 180° light distribution, 100–240V.**



ITEM NUMBER

DESCRIPTION

2G10MS9-(30-60)18OSLBEN
Watt: 9W
Lumen: 130-150lm/W
Material: AL+PC
Size: 131mm, dia: 23mm
Replaces 18W

2G10MS12-(30-60)24OSLBEN
Watt: 12W
Lumen: 130-150lm/W
Material: AL+PC
Size: 174mm, dia: 23mm
Replaces 24W

2G10MS18-(30-60)36OSLBEN
Watt: 18W
Lumen: 130-150lm/W
Material: AL+PC
Size: 226mm, dia: 23mm
Replaces 36W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED 2G10 – FOR BALLAST + 230V



**LED 2G10, 4-pin, compatible with magnetic and electronic ballasts or direct 230V connection.
CRI >80, 180° light distribution, 100–240V.**



ITEM NUMBER	DESCRIPTION
-------------	-------------

2G10EMS9-(30-60)18OSLBEN	Watt: 9W Lumen: 130-150lm/W Material: AL+PC Size: 131mm, dia: 23mm Replaces 18W
--------------------------	---

2G10EMS12-(30-60)24OSLBEN	Watt: 12W Lumen: 130-150lm/W Material: AL+PC Size: 174mm, dia: 23mm Replaces 24W
---------------------------	--

2G10EMS18-(30-60)36OSLBEN	Watt: 18W Lumen: 130-150lm/W Material: AL+PC Size: 226mm, dia: 23mm Replaces 36W
---------------------------	--

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED 2G11 – 230V



**LED 2G11, 4-pin, for direct 230V connection only.
CRI >80, 180° light distribution, 100–240V.**

ITEM NUMBER	DESCRIPTION
2G11MS09-(30-60)18OSLBEN	Watt: 9W Lumen: 130-150lm/W Material: AL+PC Size: 234mm, dia: 29mm Replaces 18W
2G11MS12-(30-60)24OSLBEN	Watt: 12W Lumen: 130-150lm/W Material: AL+PC Size: 329mm, dia: 29mm Replaces 24W
2G11MS18-(30-60)36OSLBEN	Watt: 18W Lumen: 130-150lm/W Material: AL+PC Size: 422mm, dia: 29mm Replaces 36W
2G11MS20-(30-60)40OSLBEN	Watt: 20W Lumen: 130-150lm/W Material: AL+PC Size: 552mm, dia: 29mm Replaces 40W
2G11MS25-(30-60)55OSLBEN	Watt: 25W Lumen: 130-150lm/W Material: AL+PC Size: 552mm, dia: 29mm Replaces 55W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED 2G11 – FOR BALLAST + 230V



LED 2G11, 4-pin, compatible with magnetic and electronic ballasts or direct 230V connection. CRI >80, 180° light distribution, 100–240V.

ITEM NUMBER	DESCRIPTION
2G11EMS09-(30-60)18OSLBEN	Watt: 9W Lumen: 130-150lm/W Material: AL+PC Size: 234mm, dia: 29mm Replaces 18W
2G11EMS12-(30-60)24OSLBEN	Watt: 12W Lumen: 130-150lm/W Material: AL+PC Size: 329mm, dia: 29mm Replaces 24W
2G11EMS18-(30-60)36OSLBEN	Watt: 18W Lumen: 130-150lm/W Material: AL+PC Size: 422mm, dia: 29mm Replaces 36W
2G11EMS20-(30-60)40OSLBEN	Watt: 20W Lumen: 130-150lm/W Material: AL+PC Size: 552mm, dia: 29mm Replaces 40W
2G11EMS25-(30-60)55OSLBEN	Watt: 25W Lumen: 130-150lm/W Material: AL+PC Size: 552mm, dia: 29mm Replaces 55W

The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.

LED 2G11 – DIMMABLE FOR DALI LED DRIVER




**LED 2G11, 4-pin, for dimmable LED driver.
CRI >80, 180° light distribution**

ITEM NUMBER	DESCRIPTION
2G11DC09-(30-60)18OSLBEN	Watt: 9W Lumen: 130-150lm/W Material: AL+PC Size: 234mm, dia: 29mm Replaces 18W
2G11DC12-(30-60)24OSLBEN	Watt: 12W Lumen: 130-150lm/W Material: AL+PC Size: 329mm, dia: 29mm Replaces 24W
2G11DC18-(30-60)36OSLBEN	Watt: 18W Lumen: 130-150lm/W Material: AL+PC Size: 422mm, dia: 29mm Replaces 36W
2G11DC25-(30-60)55OSLBEN	Watt: 25W Lumen: 130-150lm/W Material: AL+PC Size: 552mm, dia: 29mm Replaces 55W

DAL015OTI1A0-OSR OSRAM DALI LED Driver OTI DALI 15/220-240/1A0 NFC



DAL025OTI700-OSR OSRAM DALI LED Driver OTi DALI 25/220-240/700 NFC



The number in parentheses indicates the color temperature: 30 for 3000K, 40 for 4000K, and so on.